


# SDI输入模块

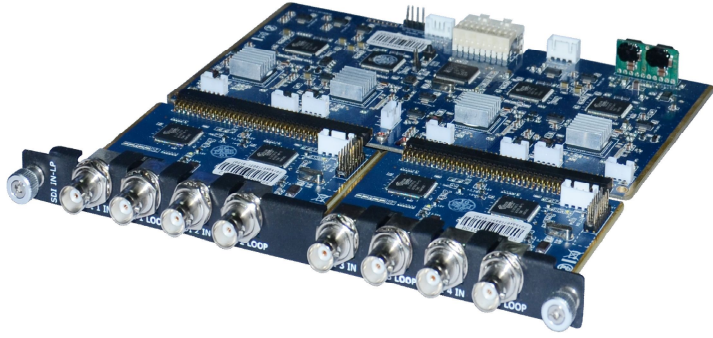

## 主要特点

- 高达4个独立的SDI输入和环路输出
- 支持SD-SDI, HD-SDI, 3G-SDI
- 可采集SDI内嵌音频信号
- 最高分辨率支持1920×1080@60
- 支持热插拔到X3设备


## 规格

输入	4 × SDI (带环路输出)
接口形态	BNC
输入分辨率	SMPTE 425M (3G Level A) 4:2:2: 1920×1080/60 (1:1)   1920×1080/50 (1:1). SMPTE 274M (HD): 1920×1080i/60 (2:1) or 1920×1080/30 (PsF)   1920×1080i/50 (2:1) or 1920×1080/30 (1:1)   1920×1080/25 (1:1)   1920×1080/24 (1:1)   1920×1080/24 (PsF) SMPTE 125M (SD): 1440×487/60 (2:1) SMPTE ITU-R BT.656 (SD)   1440×576/50 (2:1) Or dual link progressive, 625-line generic.
支持标准	SMPTE 425M – 3G Level A
数据速率	2.97Gb/s, 2.97/1.001Gb/s, 1.485Gb/s, 1.485/1.001Gb/s and 270Mb/s
均衡	Belden 1694A cable:
	100m at 2.97Gb/s
	200m at 1.485Gb/s
	400m at 270Mb/s

## 订货编码

产品代码	项目
190-0003-04-0	4路SDI输入模块

## 尺寸

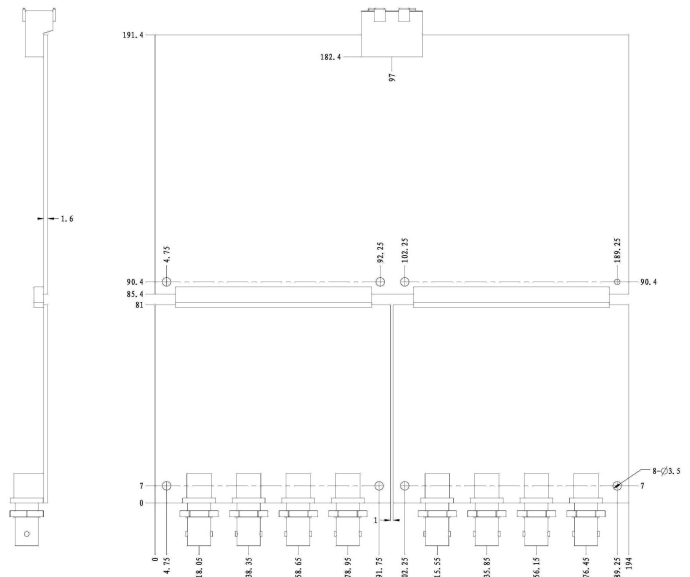

**RGBlink™**  
视诚

电话: +86-592-5771197 传真: +86-592-5788216  
E-mail: sales@rgblink.com http://www.rgblink.com  
公司总部: 厦门市湖里区留学人员创业园伟业楼S601~604, 606, 607, 504

所有规格基于视诚公司的测试条件, 如有变更, 恕不另行通知!

