

MSP 225

HDMI转H.264小型转换器



主要特点

- 1U标准产品外观
- 兼容HDMI 1.3输入
- H.264输出
- 输出分辨率可按输出分辨率列表修改
- USB上位机控制


规格

接口	输入	2 × HDMI (HDMI-A)	
	输出	2 × H.264 (RJ45)	
	操作	USB	
	电源	5.4mm DC Socket	
性能	输入分辨率	VESA:	1024x768x60/75/85 1280x800x60 1280x1024x60/75/85 1360x768x60 1366x768x60 1400x1050x60 1440x900x60 1600x1200x60 1680x1050x60 1920x1080x60
		SMPTE:	480i60 576i50 720P50/59.94/60 1080i50/59.94/60 1080P25/29.97/30/50/59.94/60
	输出分辨率	176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x384 480x480 544x480 608x448 640x360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080	
		刷新率	10~60FPS
	支持标准	HDMI	1.3
	H.264	H.264/MPEG-4 AVC	
解码协议	H.264 baseline/main/high profile L4.2 MJPEG/JPEG baseline		
电源	输入电压	12V DC (外置电源)	
	最大功率	1A	
工作环境	温度	0°C~45°C	
	湿度	10%~85%	
物理参数	重量	0.27kg (设备重量)	
	尺寸	98mm x 92.9mm x 44mm (设备尺寸)	

订货编码

产品代码	项目
600-0225-01-1	MSP 225

尺寸

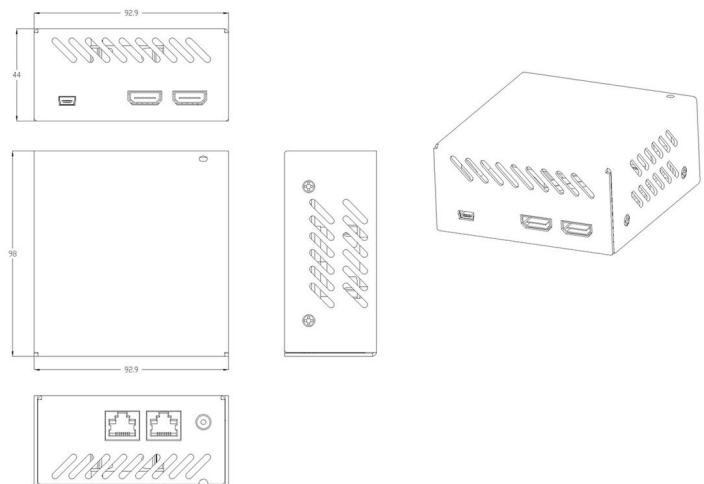

RGBlink™

