




应用图

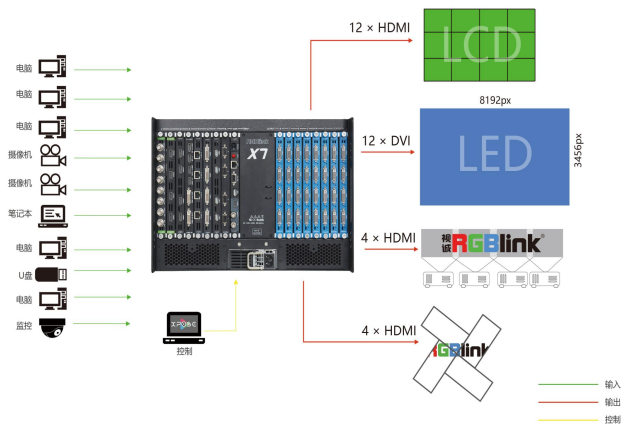


订货编码

产品代码	项目
310-0007-00-0	X7
190-0003-01-0	4路2K DVI输入模块
190-0003-35-0	4路 2K D-HDMI 输入模块
190-0003-14-0	4路 3G D-SDI 输入模块
190-0003-03-0	4路 VGA输入模块
190-0003-06-0	4路 CVBS输入/备份模块
190-0003-07-0	4路 USB2.0输入模块
190-0003-17-0	12G SDI输入模块
190-0003-11-0	4K@30输入模块
190-0003-15-0	4K@60输入模块
190-0003-13-0	4路H.264输入模块
190-0003-18-0	4路HDBaseT输入模块

主要特点

- 支持HDR
- 12Bit画质处理
- 全插卡式输入输出设计
- 支持热插拔技术，快速任意更换
- 支持HDMI 2.0的4K@60信号输入
- 支持DP 1.2的4K@60信号输入
- 支持12G/6G/3G/HD/SD SDI输入
- 最大支持32输出64K像素超高分辨率拼接
- 64个图层多画面显示效果
- 显示系统管理实现多显示屏多场景独立切换
- 4K/2K EDID管理
- H.264流媒体输入
- 支持GenLock外同步实现时序同步拼接
- 支持XPOSE软件与T系列台控控制，
- 电源模块拔插技术和1+1冗余功能

尺寸

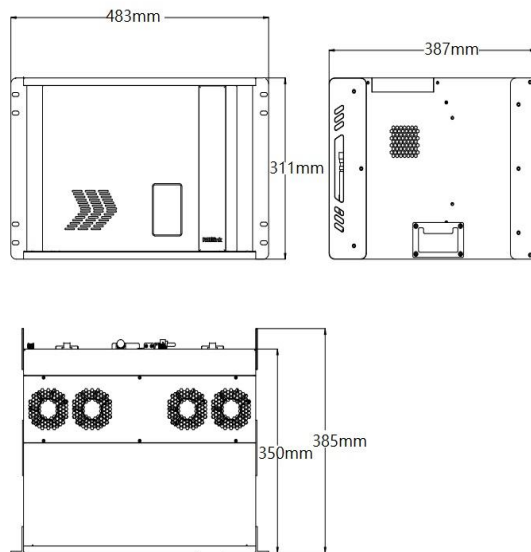

产品代码	项目
190-0003-21-0	4路DVI输出模块
190-0003-22-0	4路 2K HDMI输出模块
190-0003-24-0	4路 3G-SDI输出模块
190-0003-25-0	4路 HDBaseT 输出模块
190-0003-27-0	流媒体输出模块
190-0003-28-0	ARO 旋转模块
190-0003-38-0	2路 HDMI2.0输出模块
190-0003-41-0	4路 光纤输出模块
950-0006-00-0	热插拔电源 1200W
190-0007-01-0	PVW多画面预监模块



# 规格

接口	输入	8 插槽, 支持32路输入 选配 4K@60 模块 12G SDI模块 4K@30 模块 3G SDI模块 HDMI模块 DVI模块 H.264模块 HDBaseT模块 VGA模块 CVBS模块 USB模块	1 x DVI-I   2 x HDMI-A   1 x DisplayPort 4 x BNC (1 x 12G /6G SDI 或 4 x 3G SDI ) 2 x DVI-I   2 x HDMI-A   2 x DisplayPort 8 x BNC (4 In   4 Loop) 4 x HDMI-A 4 x DVI-I 4 x RJ 45 4 x RJ 45 4 x DB 15 8 x BNC (4 In   4 Backup) 4 x USB-A
	输出	8插槽, 支持32路输出 选配 4K HDMI 模块 2K HDMI模块 3G SDI模块 DVI模块 HDBaseT模块 H.264模块 DVI旋转模块 光纤输出模块	2 x HDMI-A 4 x HDMI-A 4 x BNC 4 x DVI-I 4 x RJ 45 4 x RJ45   2 x HDMI-A 4 x DVI-I 4 x LC
	预览	可装入输出插槽 选配 PVW模块	1 x RJ45   2 x DVI-I
	通讯	LAN RS 232 USB WIFI Genlock/外同步	1 x RJ 45 1 x DB 9 1 x USB-A 1 x I-PEX接口 2 x BNC (1In/1Loop)   1 x HDMI-A
	电源	2 插槽 最大可装2个电源	1 x IEC (每个电源)
性能	输入分辨率	SDI SMPTE 480i   576i   720p@23.98/24/25/29.97/30/50/59.94/60   1080i@59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.8/24/25/29.7/30   2160p@23.98/24/25/29.97/30/50/59.94/60 DVI SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.8/24/25/29.7/30   2160p@30 VESA 800x600@60   1024x768@60   1280x768@60   1280x960@60   1280x1024@60   1360x768@60   1440x900@60   1400x1050@60   1600x1200@60   1680x1050@60   1920x1080@60   2048x1080@60   2048x1152@60   2560x960@60   3840 x 2160@30 HDBaseT SMPTE 720p@50/60   1080p@24/25/30/50/60 VESA 800x600@60/75/85   1024x768@60/75/85   1280x768@60   1280x800@60   1280x1024@60/75/85   1360x768@60   1366x768@60   1400x900@60   1400x1050@60   1600x1200@60   1680x1050@60   1920x1080@60   1920x1200@60   2048x1152@60   2560x812@60   2048x816@60 CVBS SMPTE 480i   576i VGA VESA 800x600@60   1024x768@60   1280x960@60   1280x1024@60   1360x768@60   1400x1050@60   1440x900@60   1600x1200@60   1680x1050@60   1920x1080@60 H.264 176x144   240x180   320x180   320x240   320x256   352x228   352x480   400x224   400x320   480x270   480x272   480x320   480x360   480x480   544x480   608x448   640 x 360   640x480   704x576   720x404   720x480   720x540   720x576   850x480   1024x576   1280x720   1680x1056   1920x1080 HDMI   DisplayPort SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60   1080p@50/59.94/60   2160p@30/60 VESA 800x600@60   1024x768@60   1280x768@60   1280x800@60   1280x1024@60   1360x768@60   1366x768@60   1400x900@60   1600x1050@60   1600x1200@60   1680x1050@60   1920x1080@60   1920x1200@60   2048x1080@60   2048x1152@60   2560x812@60   2560x960@60   2560x1600@60   3840x1080@60   3840x2160@30   3840x2160@60	
	输出分辨率	选择标准或者自定义 SDI SMPTE 720p@23.98/24/25/29.97/30/50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.8/24/25/29.7/30 DVI   HDBaseT SMPTE 720p@50/59.94/60   1080p@50/59.94/60 VESA 800x600@60   1024x768@60/75/85   1280x720@50/59.94/60   1280x800@60   1280x960@60   1280x1024@60/75/85   1400x1050@60   1600x1200@60   1920x1080@23.98/24/25/29.97/30/50/59.94/60   2048x1152@60 H.264 176x144   240x180   320x180   320x240   320x256   352x228   352x480   400x224   400x320   480x270   480x272   480x320   480x360   480x480   544x480   608x448   640 x 360   640x480   704x576   720x404   720x480   720x540   720x576   850x480   1024x576   1280x720   1680x1056   1920x1080 HDMI SMPTE 720p@25/30/50/60   1080p@23.98/24/25/29.97/30/50/59.94/60   2160p@23.98/24/25/29.97/30/50/60 VESA 800x600@60   1024x768@60   1280x768@60   1280x800@60   1280x1024@60   1360x768@60   1366x768@60   1400x900@60   1600x1050@60   1600x1200@60   1680x1050@60   1920x1080@60   1920x1200@60   2048x1152@60   2560x812@60   2560x816@60   2560x1600@60   3840x1080@60   3840x2160@60   4096x2160@60 Fiber SMPTE 720p@50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60 VESA 1024x768@60   1280x768@60   1280x1024@60   1600x1200@60   1920x1080@60   2048x1152@60   2560x816@60	
	支持标准	HDMI 2.0 SDI SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI,MADI DP 1.2 DVI Dual Link HDBaseT 1.0	
	功能	灰度等级 12bit 色空间 4:4:4	
电源	输入电源	AC 100V-240V, 50/60Hz	
	最大功率	400W	
工作环境	温度	0°C ~ 55°C	
	湿度	10%~90%	
物理参数	重量	设备重量 18kg 包装重量 45kg	
	尺寸	设备尺寸 482mmx385mmx311mm 包装尺寸 547mmx620mmx415mm	

