


VENUS X3p



应用图

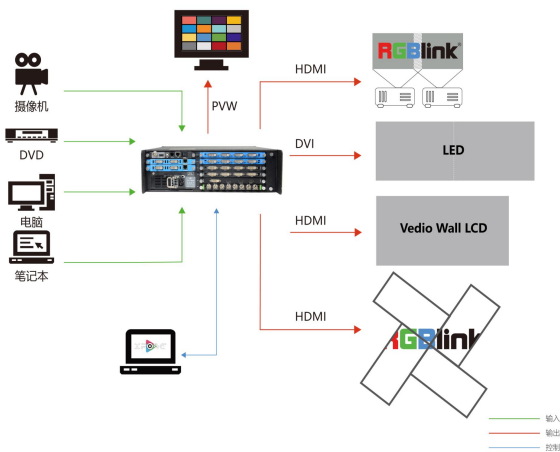


订货编码

| 产品代码 | 项目 |
|---------------|--|
| 310-1003-11-0 | VENUS X3p (标配PVW模块) |
| 190-0003-01-0 | 4路 DVI 输入模块 |
| 190-0003-05-0 | 4路 S-HDMI 2K@60 输入模块 |
| 190-0003-06-0 | 4路 CVBS 输入/备份模块 |
| 190-0003-11-0 | 4K@30 输入模块 (三选一) |
| 190-0003-14-0 | 4路 3G-SDI 输入/环路模块 |
| 190-0003-15-0 | 4K@60 输入模块 (四选一) |
| 190-0003-17-0 | 12G-SDI 输入模块 (1路12G-SDI, 2路6G-SDI, 4路3G-SDI) |
| 190-0003-18-0 | 4路 HDBaseT 输入模块 |
| 190-0003-19-0 | 4K HDR 输入模块 |

主要特点

- 支持HDR
- 全插卡式输入输出设计
- 支持热插拔技术，快速任意更换
- 支持HDMI 2.0的4K@60信号输入
- 支持DP 1.2的4K@60信号输入
- 支持12G/6G/3G/HD/SD SDI输入
- H.264流媒体输入
- 4K/2K EDID管理
- 标配安装两张PVW输出板
- PVW输出实现16路多画面输入预览
- 多种工作模式
- 支持3D信号
- GENLOCK外同步
- 支持XPOSE软件与T系列控制台控制
- 电源模块拔插技术和电源1+1冗余功能

尺寸图

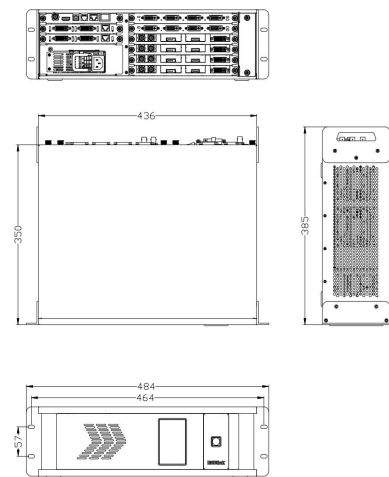

| 产品代码 | 项目 |
|---------------|--------------------------|
| 190-0003-35-0 | 4路 D-HDMI 2K@60 输入模块 |
| 190-0003-21-0 | 4路 DVI 输出模块 |
| 190-0003-22-0 | 4路 2K HDMI 输出模块 |
| 190-0003-24-0 | 4路 3G-SDI 输出模块 |
| 190-0003-27-0 | 4路 H.264(RJ45) 流媒体预览模块 |
| 190-0003-28-0 | ARO 旋转模块 (4路DVI独立任意旋转) |
| 190-0003-38-0 | 2路 4K HDMI 2.0 输出模块 |
| 190-0007-01-0 | 多画面预览模块 |
| 190-0007-21-0 | 2路 4K HDMI 2.0 输出模块(多画面) |
| 950-0005-00-0 | 热插拔电源 400W |

电话: +86-592-5771197 传真: +86-592-5788216 E-mail: sales@rgblink.com
 公司总部: 厦门火炬高新区新科广场3号楼板上社37-3号601A室

所有规格如有变更, 恕不另行通知!



规格

| | | | | |
|----|-------|--|--|--|
| 接口 | 输入 | 4 插槽, 支持16 路输入 选配 4K@60 模块 12G SDI模块 3G SDI模块 D-HDMI模块 DVI模块 HDBaseT 模块 CVBS 模块 4K@30模块 S-HDMI模块 4K HDR模块 | 1xDVI-I 2xHDMI-A 1xDisplayPort 4xBNC (1路12G SDI, 或者4路3G SDI) 8xBNC (4 In 4 Loop) 4xHDMI-A 4xDVI-I 4xRJ45 8xBNC (4 In 4 Backup) 1xDVI-DL(1xDVI LOOP)/1xHDMI 1.4(1xLOOP)/1xDisplayPort 4xHDMI-A 4xHDMI-A | |
| | 输出 | 2 插槽, 支持8 路输出 选配 3G SDI模块 2K HDMI模块 DVI模块 4K HDMI 模块 (不带图层) 4K HDMI 模块 (带图层) 旋转模块 | 4xBNC 4xHDMI-A 4xDVI-I 2xHDMI-A 2xHDMI-A 4xDVI-I | |
| | 预览 | 2 插槽 标配 选配 PVW 多画面预览模块 H.264 流媒体预览模块 | 2xDVI-I 1xRJ45 (每个模块) 4xRJ45 | |
| | 通讯 | LAN RS 232 USB Genlock/同步 | 1xRJ45 1xRJ45 1xUSB-B 1xBNC 1xHDMI-A | |
| | 电源 | 2 插槽 最多可装2个电源 | 1xIEC (每个电源) | |
| 性能 | 输入分辨率 | 3G SDI SMPTE DVI HDMI SMPTE VESA HDBaseT SMPTE VESA CVBS SMPTE H.264 4K@30 SMPTE VESA 4K@60 SMPTE VESA 12G SDI SMPTE | 480i 576i 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@239.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 800x600@60 1024x768@60 1280x768@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x960@60 720p@50/60 1080p@24/25/30/50/60 800x600@60/75/85 1024x768@60/75/85 1280x768@60 1280x800@60 1280x1024@60/75/85 1360x768@60 1366x768@60 1400x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2048x816@60 480i 576i 176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x480 544x480 608x448 640 x 360 640x480 704x576 720x404 720x480 720x540 1280x720 720x576 850x480 1024x576 1680x1056 1920x1080 480p 576p 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30 800x600@60 1024x768@60 1280x800@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1080@60 2048x1152@60 2560x1600@60 3840 x 2160@30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@50/59.94/60 2160p@30/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1080@60 2048x1152@60 2560x812@60 2560x960@60 2560x1600@60 3840x1080@60 3840x2160@30 3840x2160@60 720p@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/59.94/60 | |
| | 输出分辨率 | 选择标准分辨率或者自定义分辨率 SDI SMPTE DVI HDMI SMPTE VESA 4K HDMI SMPTE | 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.8/24/25/29.7/30 720p@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 800x600@60 1024x768@60 1280x800@60 1280x960@60 1280x1024@60 1360x768@60 1440x900@60 1400x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 2048x1152@60 720p@25/30/50/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@23.98/24/25/29.97/30/50/60 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@60 4096x2160@60 | |
| | 支持标准 | SDI HDMI DP DVI HDBaseT | SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI,MADI 2.0 1.2 双链路 1.0 | |
| | 灰度等级 | 12 bit | | |
| | 色空间 | 4:4:4 | | |
| | 电源 | 输入电源 最大功率 | AC 100~264V 50/60Hz 400W | |
| | 工作环境 | 温度 湿度 | -25℃~55℃ 10%~90% | |
| | 物理参数 | 重量 | 设备重量 包装重量 | 12.3kg 20.4kg |
| | | 尺寸 | 设备尺寸 包装尺寸 | 485mm×387mm×135mm 635mm×545mm×275mm |

电话: +86-592-5771197 传真: +86-592-5788216 E-mail: sales@rgblink.com

公司总部: 厦门火炬高新区新科广场3号楼板上社37-3号601A室

所有规格如有变更, 恕不另行通知!

